


HELI

FORKLIFT

CPCD120-135



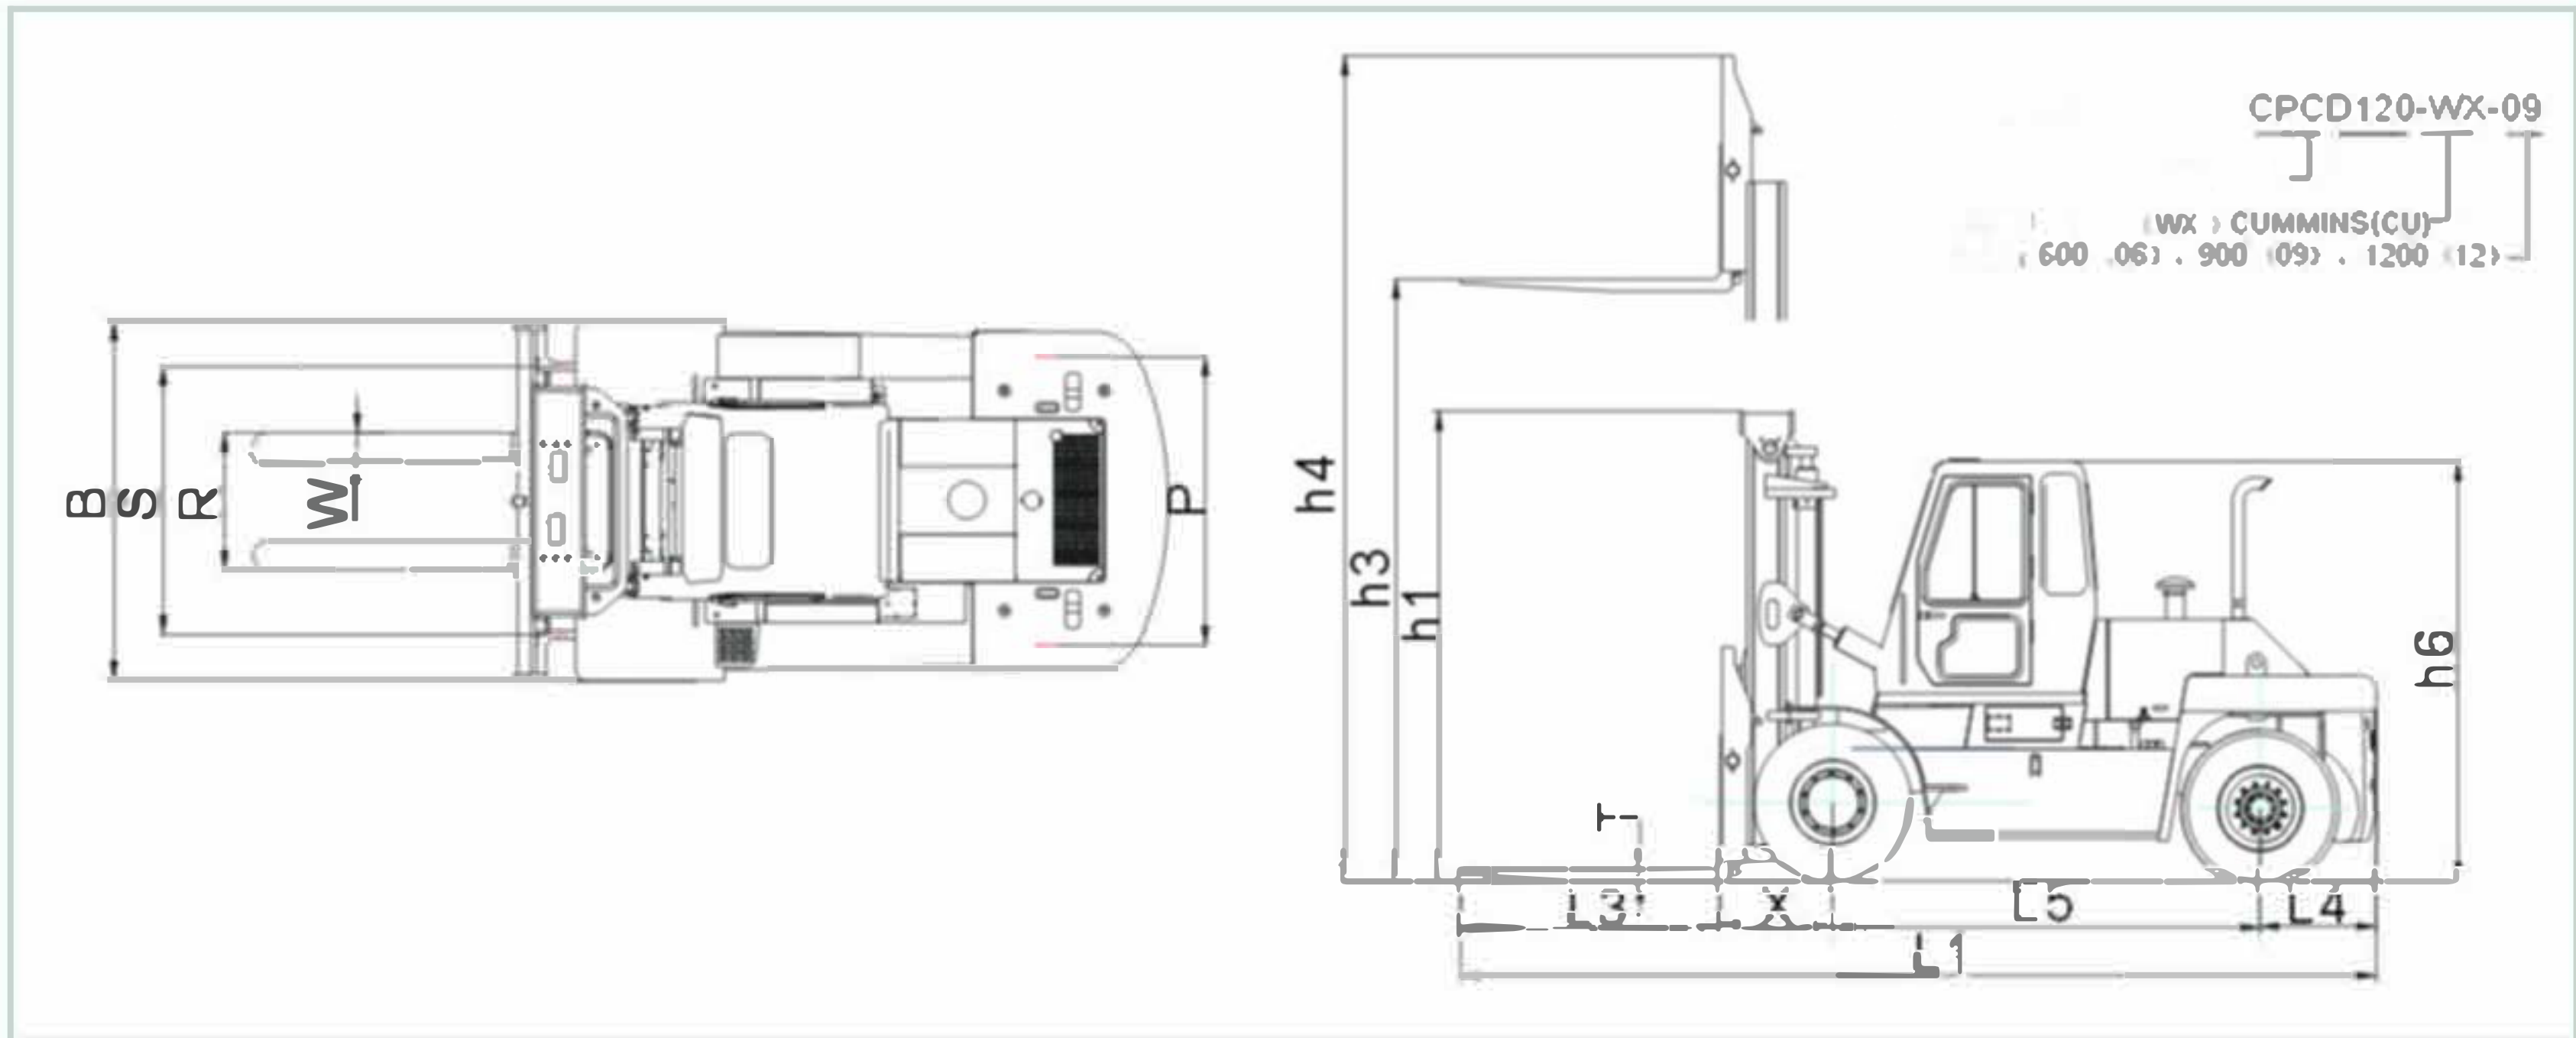

SPECIFICATIONS

Model		CPCD120-WX-06 CPCD120-CU-06	CPCD120-WX-09 CPCD120-CU-09	CPCD135-WX-06 CPCD135-CU-06	
Load Centre	mm	600	900	600	
Rated Load	kg	12000		13500	
Lift Height (standard)	mm	3000			
Lifting Speed (loaded)	mm/s	350			
Lowering Speed (loaded)	mm/s	370			
Mast Tilt (fwd/bwd)	Deg	6/12			
Travel Speed (loaded/unloaded)	km/h	28/29			
Min. Turning Radius	mm	4400	4500		
Gradeability	%	28			
Overall Length (with Fork)	mm	5820	6420	5820	
Overall Width	mm	2520			
h1 Overall Height (at Mast)	mm	3300			
Wheelbase	mm	3000			
Tread (fwd/bwd)	mm	1950/2050			
Overhang (fwd/bwd)	mm	780/820			
Min. Under clearance	mm	215			
Fork	Space	500-2370			
	Length	mm	1220	1820	1220
	Width/Thickness	mm	200/85		
Engine	Type	Cummins QS86.7 / Wuxi CA6110/125ZL-HL20 diesel engine			
	Cyl. Number/ Displacement	/L	6/6.7 / 6/7.127		
	Rated Power/Rated Speed	kW/rpm	119 /2200 / 117/2200		
	Max. torque/Rotate Speed	Nm/rpm	730/1400 / 590/1600		
	Fuel Consumption	g/kWh	≤211 / ≤235		
Transmission		Electric-hydraulic control box for HELI			
	Front	11.00-20			
	Rear	11.00-20			